


2.2 Description of Dominus V2 pairings to the respective generator.

Generator	App profile name	Connection diagram	Generator configuration parameters
Fam. Trio/Trio Pack/Trio Hydro	Trio/Trio Pack/Trio Hydro	Connection diagram (Fig. 6)	On the generator control panel, select the item 'System Supervision' in the system Service/Definitions menu and set the option 'Domin'
Fam. Magis Pro/Combo V2	Magis Pro-Combo V2	Connection diagram (Fig. 6)	On the generator control panel, set parameter 'A30' to the value 'ON'.
Fam. Magis Hercules Pro	Magis Hercules Pro	Connection diagram (Fig. 6)	On the generator control panel, select the item 'System Supervision' in the system Service/Definition menu and set the option 'Domin'
	Magis Hercules Pro Mini		
	Magis Hercules Mini Hydro		
Fam. Victrix Superior Fam. Hercules	Superior	Connection diagram (Fig. 6)	On the generator control panel, select the item 'Type' in the Service/Modbus menu and set the option 'Dominus'
System Manager	System manager	Connection diagram (Fig. 6)	On the generator control panel, select the item 'B04' in the Service/Supervisor menu and set the option 'Yes'
Magis Hercules-Erp	Magis Hercules	Connection diagram (Fig. 6)	Set the parameter 'BMS' in the 'ConF' menu to the value 1.

N.B.: for more details on the column 'Generator configuration parameters' refer to the generator booklet.

3. WIRING DIAGRAMS.

3.1 Practical wiring diagram of power supply and ModBus connections.

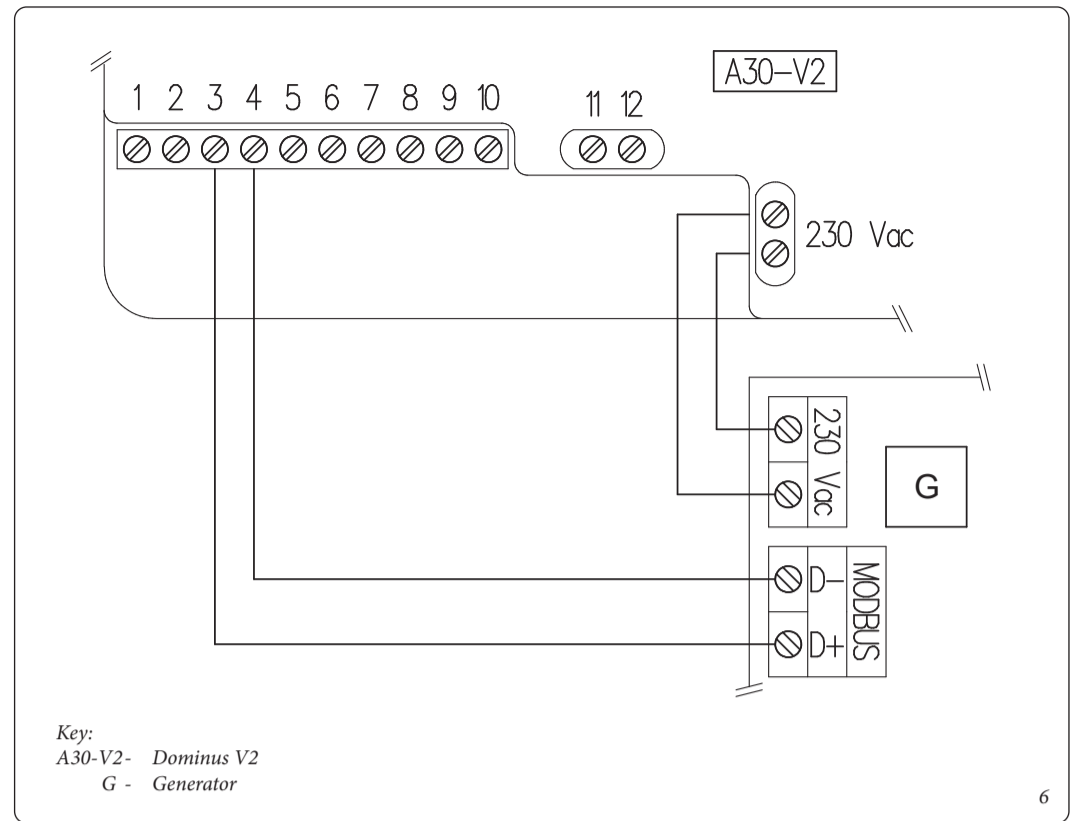

N.B.: for connection to the power supply line (230 Vac), provide a double-insulated electrical cable.

N.B.: the 230 Vac connector of the generator is identified, depending on the type of generator, as 'A B' or 'L N' auxiliary. If the latter is not available, make use of the 230Vac / 50Hz home mains supply by powering Dominus V2 in compliance with standards in force regarding electrical installation, which anyhow must include a class III overvoltage category omnipolar disconnection device.



immergas.com



Immergas S.p.A.
42041 Brescello (RE) - Italy
Tel. 0522.689011
Fax 0522.680617

QR Code Android



QR Code iOS

